

LOSTINE

The Elsa System
Edmund Chandelier - Quintet



Edmund Chandelier - Quintet



TECHNICAL SPECIFICATIONS

PUCK

 Black Walnut

CANOPY & FRAMEWORK

 Satin Brass

SHADE

 Black Walnut

MOUNT

Flat ceiling standard mount. Can be adjusted for a sloped ceiling when installing.

LAMPING

5 x E26 base, 120 VAC.

BULB

To ensure lifelong performance we recommend the use of LED bulbs under 40 watts.

CERTIFICATIONS

UL Listed.


NOTES

1. Made to order. Please allow 6 - 8 weeks for delivery.
2. The Elsa System ships pre-assembled with a 36" drop. Installation kit and instructions are included allowing you to adjust the drop to the height of your choosing.
3. Tala Lurra 3-Watt Lightbulb, Tala Globe 6-Watt Lightbulb or Tala Squirrel Cage 3-Watt Lightbulb can be purchased separately for strong, smooth and warm light with full dimming compatibility. Light bulb not included
4. Finish samples are available upon request.

CARE

- Please care for the brass pieces with a soft cloth, and avoid using any abrasive cleaners or products.
- Natural patina process is quickened by touch and exposure. Gloves are recommended for installation.

Edmund Chandelier - Quintet

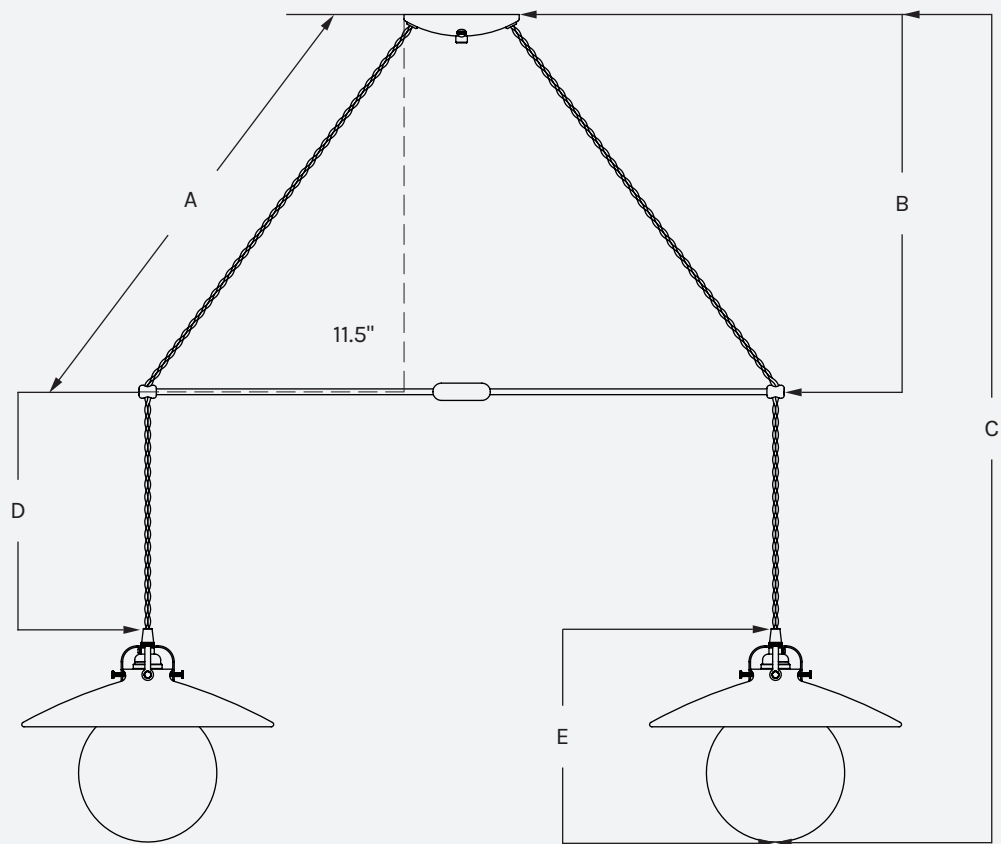

(A) Upper Drop Cord Length (B) Upper Drop (C) Overall Drop (D) Lower Drop (E) Pendant Height

ELSA SYSTEM DROP CALCULATION

- STANDARD DROP HEIGHT

36" Overall Drop Height / 10.5" Lower Drop Height

Each pendant installed on The Elsa System comes with additional cord to allow adjustments to the overall drop as needed.
- UPPER DROP CORD LENGTH CALCULATION

$\text{Upper Drop}^2 + 11.5^2 = \text{Upper Drop Cord Length}^2$
- OVERALL DROP CALCULATION


Height of Pendant + Lower Drop + Upper Drop = Overall Drop Height
- OVERALL DROP EXAMPLE

Height of Pendant + Lower Drop + Upper Drop

$9.25" + 10.5" + 16.25" = 36"$

Edmund Chandelier - Quintet

ISOMETRIC VIEW

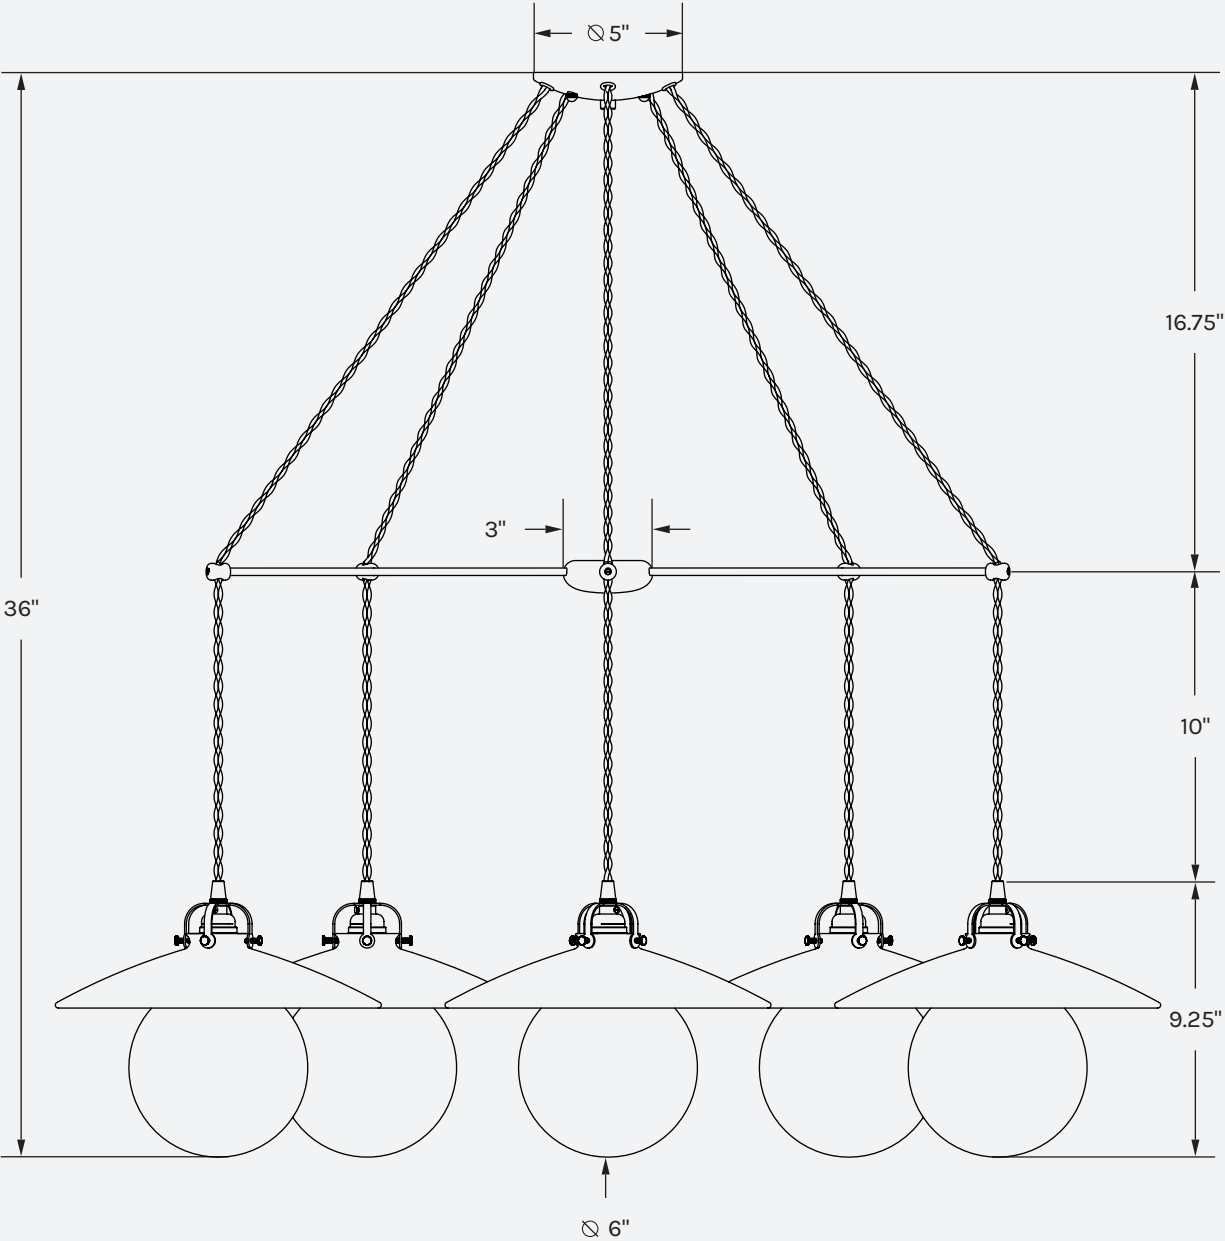

Minimum Overall Drop: 22 (in)

Maximum Overall Drop: 10 (ft)

Pendant Weight: 2.65 (lbs)

Edmund Chandelier - Quintet

BOTTOM VIEW

